




## Z41H-16C/25-/40 型楔式闸阀

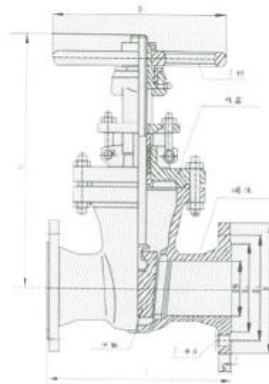

### 一、用途

本产品适用全开全闭的各种管道，不用于节流。

### 二、主要零件材料

零件名称	材料
阀体、阀盖	WCB
闸瓣	灰铸铁+黄铜
阀杆	不锈钢
阀杆螺母	铜

### 三、性能规范

型号	公称压力 (MPa)	试验压力		适用温度 ( )	适用介质
		强度(水) (MPa)	密封(水) (MPa)		
Z41H-16C	1.6	2.4	1.8	350	蒸气、水、 油、煤气
Z41H-25	2.5	3.75	2.75		
Z41H-40	4.0	4.0	4.4	425	

### Z41H-16C 连接尺寸、外型尺寸

DN (mm)	L	D	D <sub>1</sub>	D <sub>2</sub>	b-f	z-Φd	H	D <sub>0</sub>	重量(kg)
40	240	145	110	85	18-1	4-Φ18	295	190	
50	250	160	125	100	20-2	4-Φ18	320	215	
65	270	180	145	120	20-2	4-Φ18	335	240	
80	280	195	160	135	20-2	8-Φ18	360	255	
100	300	215	180	155	22-2	8-Φ18	420	290	
125	325	245	210	185	22-2	8-Φ18	485	290	
150	350	280	240	210	24-2	8-Φ23	550	320	
200	400	335	295	265	24-2	12-Φ23	710	390	
250	450	405	355	310	26-2	12-Φ25	989	450	
300	500	460	410	375	28-2	12-Φ25	1145	560	

### Z41H-16C 连接尺寸、外型尺寸

DN (mm)	L	D	D <sub>1</sub>	D <sub>2</sub>	b-f	z-Φd	H	D <sub>0</sub>	重量(kg)
40	200	145	110	85	18-3	4-Φ18	350	200	18
50	250	160	125	100	20-3	4-Φ18	358	240	28
65	270	180	145	120	22-3	8-Φ18	373	240	33
80	280	195	160	135	22-3	8-Φ18	435	280	46
100	300	230	190	160	24-3	8-Φ23	501	320	64
125	325	270	220	188	28-3	8-Φ25	614	360	105
150	350	300	250	218	30-3	8-Φ25	674	360	134
200	400	360	310	278	34-3	12-Φ25	818	400	213
250	450	425	370	332	36-3	12-Φ30	969	450	290
300	500	485	430	390	40-4	16-Φ30	1145	560	399



## Z41H-16C 连接尺寸、外型尺寸

DN (mm)	L	D	D <sub>1</sub>	D <sub>2</sub>	b-f	z-Φd	H	D <sub>0</sub>	重量 (kg)
40	200	145	110	85	18-3	4-Φ18	350	200	18
50	250	160	125	100	20-3	4-Φ18	358	240	28
65	270	180	145	120	22-3	8-Φ18	373	240	33
80	280	195	160	135	22-3	8-Φ18	435	280	46
100	300	230	190	160	24-3	8-Φ23	501	320	64
125	325	270	220	188	28-3	8-Φ25	614	360	105
150	350	300	250	218	30-3	8-Φ25	674	360	134
200	400	360	310	278	34-3	12-Φ25	818	400	213
250	450	425	370	332	36-3	12-Φ30	969	450	290
300	500	485	430	390	40-4	16-Φ30	1145	560	399